

**Link Collection**  
**54 Inch Link Fan PN**  
 300168PN (Polished Nickel)

Project Name: \_\_\_\_\_  
 Location: \_\_\_\_\_  
 Type: \_\_\_\_\_  
 Qty: \_\_\_\_\_  
 Comments: \_\_\_\_\_

**Product Information**

Product ID	300168PN
Finish	Polished Nickel
Blade Finish	Walnut/Non-Reversible
Collection	Link Collection

**Airflow, Power and Efficiency**

Speed	RPM	CFM	CFM/ Watt	Amps	Watts
High	152	5126	158	.46	32
Med	90	2988	336	.14	9
Low	51	1387	408	.06	3

**Specifications**

Number of Blades	2
Blades Included	Yes
Blade Pitch	28 Degrees
Blade Sweep	54"
Blades Reversible	No
Blade Material	ABS
Optional Blades Available	No
Downrod 1	FLUSH MOUNT

6 Speed Dc Cooltouch - In project applications using multiple ceiling fans, alternative remote controls may be required. Please contact Kichler Advanced Product Solutions at 844-542-4537 to confirm your project requirements.

Primary Control System	6 Speed Dc Cooltouch - In project applications using multiple ceiling fans, alternative remote controls may be required. Please contact Kichler Advanced Product Solutions at 844-542-4537 to confirm your project requirements.
Remote Included	Yes
Wall Control Included	No
Low Ceiling Adaptable	No
Lead Wire Length	8.00"
Motor Size	125
Motor Type	DC

**Downlight**


Watts	32/9/3
Optional Light Kit Available	No

**Safety Listings & Certifications**

Safety Rated	Dry
Warranty	www.kichler.com/warranty



**Dimensions**

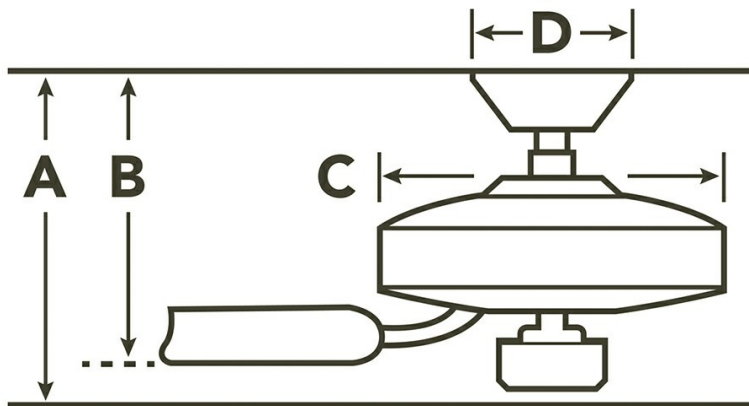

Downrod	A	B	C	D
FLUSH MOUNT	24.25	24.25	7.90	7.90

**Available Finishes**

Finish	Fixture	Glass	Blade 1	Blade 2
Brushed Nickel	300168NI	N/A	SILVER	NON-REVERSIBLE

**Kichler**  
 7711 East Pleasant Valley Road  
 Cleveland, Ohio 44131-8010  
 Toll free: 866.558.5706 or kichler.com

**Notes:**  
 1) Information provided is subject to change without notice. All values are design or typical values when measured under laboratory conditions.  
 2) Incandescent Equivalent: The incandescent equivalent as presented is an approximate number and is for reference only.

**KICHLER.**

**Link Collection**  
**54 Inch Link Fan PN**  
 300168PN (Polished Nickel)

Project Name: \_\_\_\_\_  
 Location: \_\_\_\_\_  
 Type: \_\_\_\_\_  
 Qty: \_\_\_\_\_  
 Comments: \_\_\_\_\_

Finish	Fixture	Glass	Blade 1	Blade 2
Oil Brushed Bronze	300168OBB	N/A	DARK OAK	NON-REVERSIBLE
Polished Nickel	300168PN	N/A	WALNUT	NON-REVERSIBLE
Natural Brass	300168NBR		CHERRY	NON-REVERSIBLE

**Control Options**

Product ID	Descr
370036ALMTR	6 Speed DC Wall Transmitter
370036IVTR	6 Speed DC Wall Transmitter
370036WHTR	6 Speed DC Wall Transmitter

**Installation**

Installation requirements	The electrical junction box and support structure must be securely mounted and capable of reliably supporting a minimum of 50 pounds. Use only ETL/UL listed electrical junction boxes marked ""For Fan Support""
Electrical Requirements	120V 60Hz AC
Hanging Weight	18.7 LBS
Minimum Distance Between Bottom Of Fan Blade To Floor	7.5 feet